

"CLASSIC ELEGANCE OF ELEMENTS"


600 x 1200 mm
FULLBODY TILES






INTRODUCING
TERRAZZO
COLLECTION

Presenting to you a collection that embraces the classic eminence of the elegance of Terrazzo in a new timeless dominance of superior surfaces. The collection is ready to offer you ageless prominence paired with modern finesse and attributes.




600x1200mm

Matt & Glossy
Finish

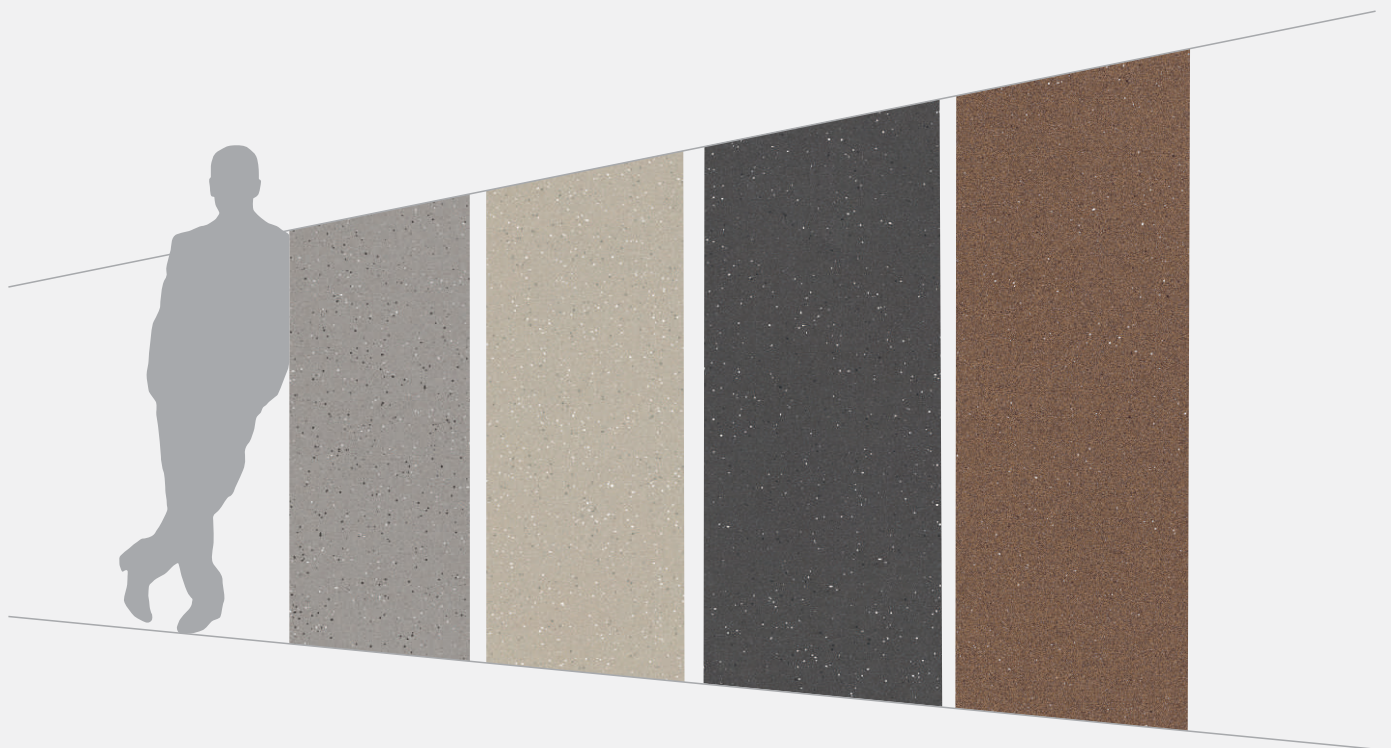

Timeless elegance in the widest color palette

Explore the widest range of colors and ambiance to craft your spaces in the reflection of your personality through the versatile and vast range of fullbody tiles of the Terrazzo Collection.



Advantages



Applications Area



KITCHEN



INTERIOR



WALL COVERING



RESIDENTIAL



COMMERCIAL



GYM



HOSPITALS



URBAN CENTERS



AVAILABLE IN
MATT & GLOSSY

TERRAZZO STAR WHITE

600x1200mm

-

Category : Super Special



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH



AVAILABLE IN
MATT & GLOSSY

TERRAZZO PEARL

600x1200mm

-

Category : Basic



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH



AVAILABLE IN
MATT & GLOSSY

TERRAZZO WALNUT

600x1200mm

-

Category : Special



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH



AVAILABLE IN
MATT & GLOSSY

TERRAZZO FERN

600x1200mm

-

Category : Basic



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH



AVAILABLE IN
MATT & GLOSSY

TERRAZZO STONE

600x1200mm

-

Category : Basic



ZERO
MAINTENANCE




IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH

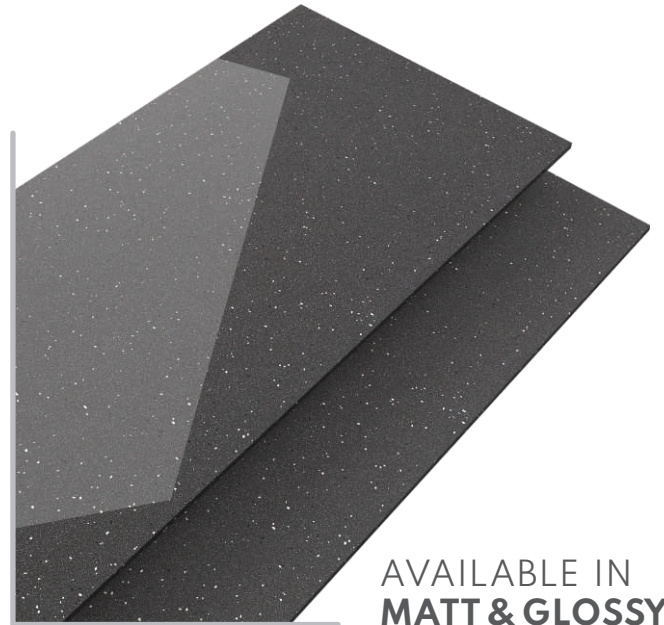

AVAILABLE IN
MATT & GLOSSY

TERRAZZO NERO

600x1200mm

-

Category : Special



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH



TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP BIa	MEAN VALUE OF OUR FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossometer
Water Absorption	≤ 0.50%	E ≤ 0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm ³	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage*	ISO-10545-13
Stain Resistance	Resistance	Resistance*	ISO-10545-14
Slip Resistance(friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

PACKING DETAILS

	Size	Pcs. / Box	Weight / Box (approx.)		Coverage Area / Box
			Polished	Matt	
	600x1200mm	2 pcs	29 kg	31 kg	15.5 ft ² or 1.44 mtr ²